




Using Double Velcro Flap Batten Pockets


1. Open both velcro flaps.

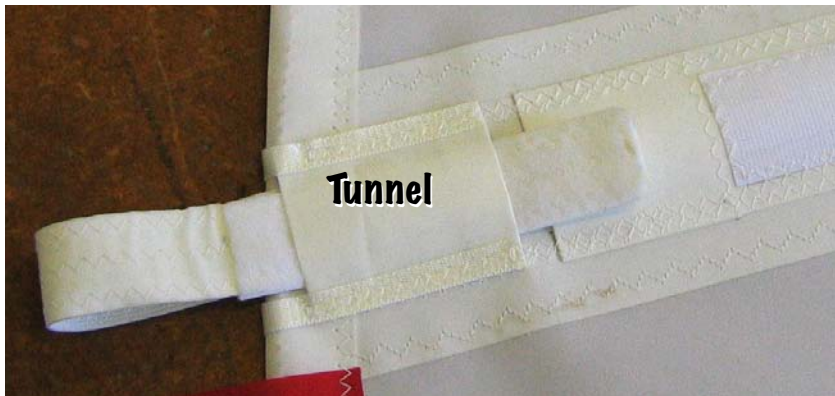

2. Insert the Leech Flap into the Tunnel at the leech end of the pocket. Only push it far enough that it just exits the Tunnel.



3. Insert the batten through the middle of the loop created by the folded over Leech Flap. Then push the batten all the way into the pocket.

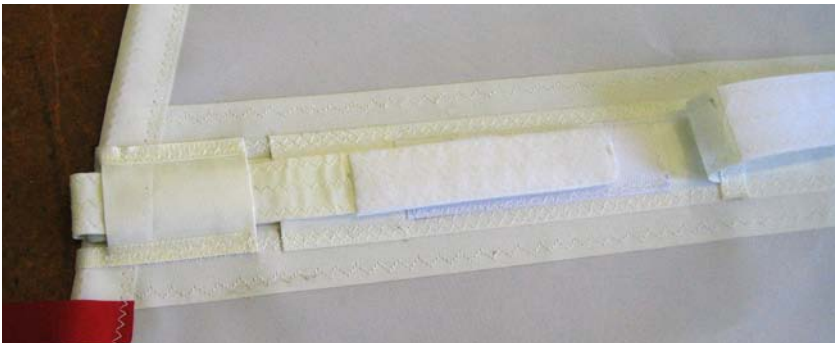

4. Pull the Leech Flap until it is just snug and then press it down onto the Velcro Pad on the outside of the pocket.



5. Finally press the Top Flap onto the top of the Leech Flap.



www.uksailmakers.com